

# DOMINO 48 XT DOMINO 96 XT

Memory Lighting Control Desk 48 or 96 Channels



## Description

- 48 faders in 2-preset mode or 96 faders in extended mode on DOMINO 96 XT - 24/48 faders on DOMINO 48 XT.
- 48 faders configurable as channels, submasters or playbacks on DOMINO 96 XT - 24 faders on DOMINO 48 XT.
- Theatrical dipless crossfade with 2 general masters, stage and preset, and dedicated buttons.
- Minimum of 500 theatrical memories to easily create and modify theatrical playbacks.
- Individual In (Up) and Out (Down) fade times for each memory and for each submaster.
- Up to 594 submasters on the DOMINO 96 XT – 378 on the DOMINO 48 XT.
- Up to 594 chasers on the DOMINO 96 XT – 378 on the DOMINO 48 XT; up to 250 steps of a Chaser can be recorded as Channels, Memory or Snapshot of the output.
- Flash/Assign pushbuttons with LED for each of the 96 faders on the DOMINO 96 XT – 48 on the DOMINO 48 XT.
- Up to 66 submasters on DOMINO 96 XT can be played simultaneously – 43 on the DOMINO 48 XT.
- LED display showing status information via scrolling messages.
- 1 SVGA output for displaying memories, patch, texts and help menus in multiple languages.
- 1 USB connector for show recording and software update.
- MIDI IN/OUT connector for MIDI functionality.
- Moving light control module, for controlling up to 128 moving lights, on DOMINO 48 XT M & 96 XT M as standard, and on DOMINO 48 XT & 96 XT as retrofit option:
  - Powerful effects engine and automatic fanning of fixtures.
  - Extensive fixture library with Web updates.
  - Comprehensive controls for filters, pallets, presets, cloning, groups, storing, lock home, etc ...
  - 6 touch pad displays (virtual wheels) for parameter control.
  - DOMINO 48 XT M: 36 groups, 96 presets, 96 pallets and 378 effects.
  - DOMINO 96 XT M: 36 groups, 192 presets, 192 pallets and 594 effects.
- 2 Physical DMX512/1990 output on XLR-5F connector.
- Fully proportional patch to 1024 dimmers.

## References

- DOMINO 48 XT** – 48 channels - 1024 DMX addresses, 1 SVGA output
- DOMINO 48 XT M** – 48 channels - 1024 DMX addresses, 1 SVGA output + Motion control module
- DOMINO 96 XT** – 96 channels - 1024 DMX addresses, 1 SVGA output
- DOMINO 96 XT M** – 96 channels - 1024 DMX addresses, 1 SVGA output + Motion control module

## Supplied with :

- power supply cable with CEE 7-7 plug

## Option

- Moving light control module for controlling up to 128 moving lights for retrofitting on DOMINO 48 XT & 96 XT.

**MC/DOM/XT**

## Accessories

- USB memory stick
- XLR3 “gooseneck” desk lamp
- Dust Cover for DOMINO 48 XT
- Dust Cover for DOMINO 96 XT
- Flight Case for DOMINO 48 XT
- Flight Case for DOMINO 96 XT
- 17” LCD/TFT monitor

**FLASHMEM  
WORKLITE/XLR3  
DC/DOM/XT/48  
DC/DOM/XT/96  
FLY/DOM/XT/48  
FLY/DOM/XT/96  
LCD17**

## Characteristics

Power requirements: 90-260 V, 47-63 Hz power supply with automatic detection.

### Dimensions

**DOMINO 48 XT**  
(Width x Depth x Height): 734 x 535 x 144 mm

Net weight: 15.5 kg

### DOMINO 96 XT


(Width x Depth x Height): 974 x 535 x 144 mm

Net weight: 26.0 kg

# DOMINO 48 XT


# DOMINO 96 XT

## Front display layout

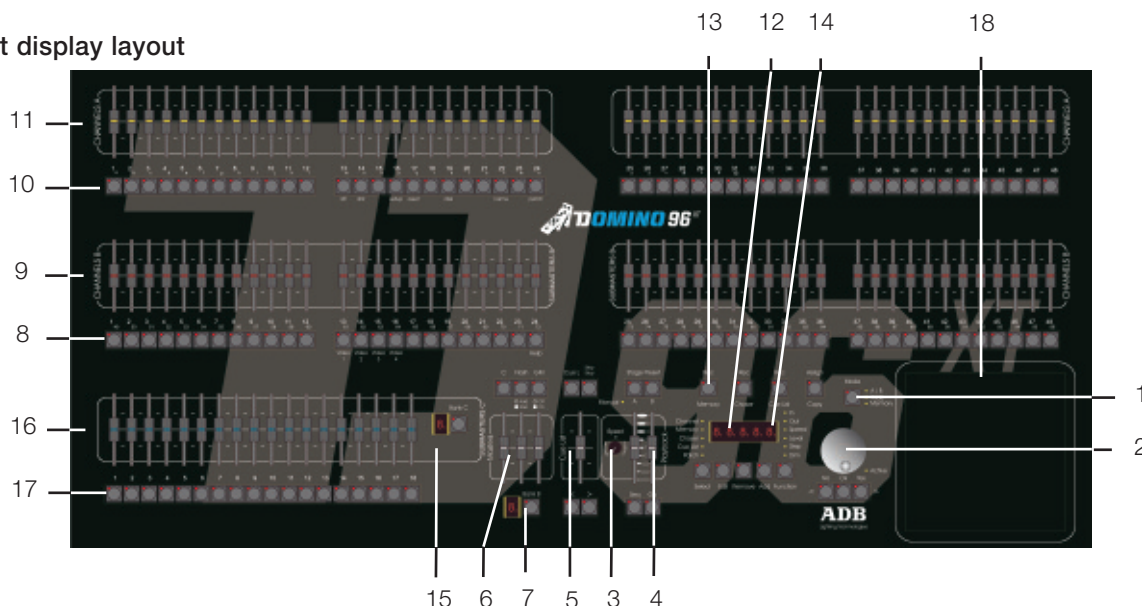

- |  |                                |
|--|--------------------------------|
| 1 Mode button – A/B, Wide & Memory modes   | 10 Flash bank A buttons        |
| 2 Wheel for editor   | 11 Channel bank A faders       |
| 3 Speed control rotating fader   | 12 Editor buttons              |
| 4 Theatrical dipless crossfade with 2 faders, stage and preset masters and dedicated buttons | 13 Record buttons              |
| 5 Cue list fader   | 14 On board LED display        |
| 6 Master faders  | 15 Bank C button               |
| 7 Bank B button  | 16 Submaster bank C faders     |
| 8 Flash bank B buttons   | 17 Flash bank C buttons        |
| 9 Submaster bank B faders  | 18 Moving light control module |

## Connector Layout

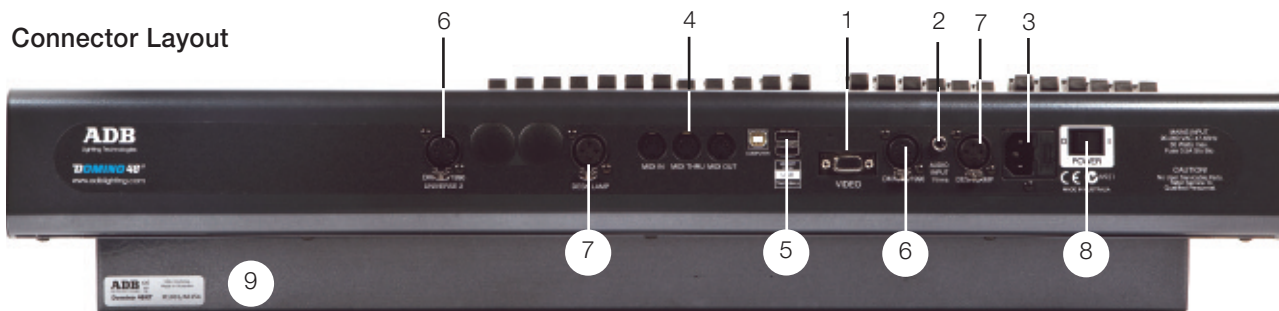

- |  |   |
|--|---|
| 1. <b>Video Output:</b> mini DB 15 female connector for video output.  | 4. <b>MIDI (IN, THRU, OUT):</b> 3 DIN 5 sockets (5 female contacts) following MIDI standard.            |
| 2. <b>Audio Input:</b> RCA (phono) type socket to accept an audio signal. The audio signal should have a nominal level of 1 volt RMS (line level). | 5. <b>USB:</b> 1 USB in and 2 USB out sockets following USB standard.                                   |
| 3. <b>Mains Input:</b> standard power supply connector type IEC320 - C14. Mains Input socket is fused with a M205 sized 500mA fuse.                | 6. <b>DMX:</b> 2 x DMX512/1990 output connector (5 pin female XLR connector) following DMX512 standard. |
|  | 7. <b>Desk Lamp:</b> XL3 output connector (3 pin female XLR connector) – 12 VDC.                        |
|  | 8. <b>Power Switch</b>  |
|  | 9. <b>Product identity plate:</b> product name and serial number.                                       |

This equipment complies with all applicable European directives and carries a CE mark.

ADB - Your Partner for Light

Belgium N.V. ADB-TTV Technologies S.A.

(Group Headquarters) Leuvensesteenweg 585, B-1930 Zaventem  
Tel : 32.2.709.32.11, Fax : 32.2.709.32.80, E-Mail : adb@adblighting.com

Deutschland ADB GmbH

Boschstrasse 3, D-61239 Ober-Mörlen  
Tel : 49.6002.93.933.0, Fax : 49.6002.93.933.33, E-Mail : info@adblighting.de

France ADB S.A.S.

**Sales Office:** 168/170, boulevard Camélinat F-92240 Malakoff  
Tel : 33.1.41.17.48.50, Fax : 33.1.42.53.54.76, E-Mail : adb.fr@adblighting.com

**Factory & Group Logistics Centre:** Zone industrielle Rouvroy F-02100 Saint-Quentin  
Tel : 33.3.23.06.35.70, Fax : 33.3.23.67.66.56, E-Mail : adb.fr@adblighting.com

Hong Kong ADB Lighting Asia Ltd

Suite 2414, Level 24, Two Pacific Place, 88 Queensway  
Tel : +852 903 232 27, E-mail : adb@adblighting.com

**ADB**  
Lighting Technologies

DS-1183-E-10n Subject to modifications